FUJIFILM

FUJINON CCTV LENS

Zoom (1500mm)

D60x12.5R3DE-ZP1

60× | Applicable camera (model) 1 2/3 1/2 1/3 1/4 | For Surveillance


Day Night

Zoom: ZOOM | Motor Drive: MOTOR DRIVE | Telephoto Long Focal: TELE | Wide Angle: WIDE | Video Auto Iris: VIDEO | Iris-Remote: IRIS-REMOTE | C Mount: C-mt | Metal Mount: METAL | ND Filter: N D | Extender: 2×

PC Control: P C | Full Servo: SERVO | RoHS Compliant: RoHS




* Photograph is a similar model.

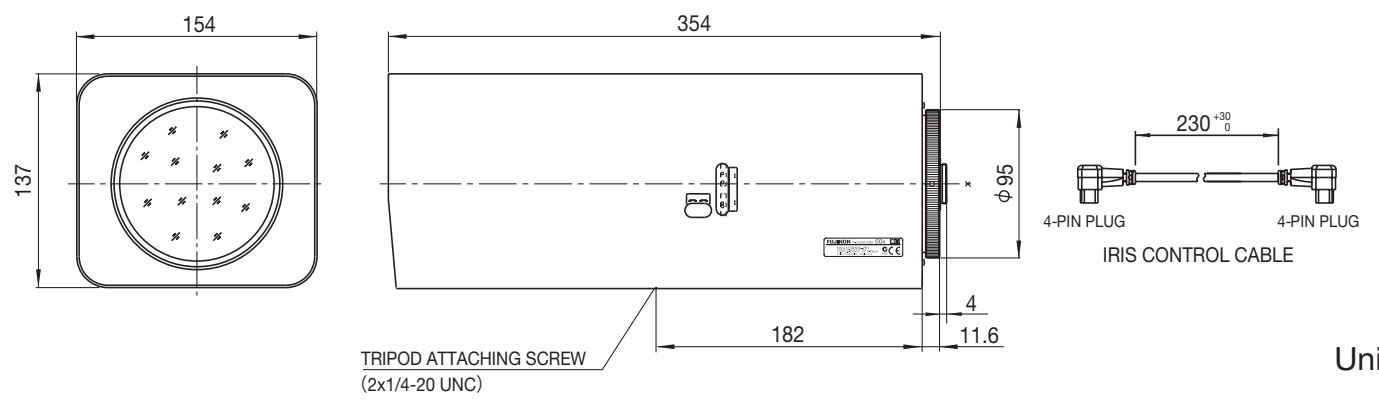


Unit : mm

D60x12.5R3DE-ZP1				
			1×	2×
Focal Length (mm)			12.5 - 750(60x)	25 - 1500(60x)
Iris Range			F3.8 - T3000 (Equivalent to F3000)	F7.6 - T3000 (Equivalent to F3000)
Operation	Zoom		Servo Control	
	Focus		Servo Control	
	Iris		Auto (Video Type) or Remote or Servo Control*1*2	
Angle Of View (H×V)	1/2"	WIDE	28°43' × 21°44'	14°35' × 10°58'
		TELE	0°29' × 0°22'	0°15' × 0°11'
	1/3"	WIDE	21°44' × 16°23'	10°58' × 8°14'
		TELE	0°22' × 0°17'	0°11' × 0°08'
	1/4"	WIDE	16°23' × 12°20'	8°14' × 6°11'
		TELE	0°17' × 0°08'	0°08' × 0°06'
Focusing Range (From Front Of The Lens)(m)			∞ - 5	
Object Dimensions at M.O.D. (H×V) (mm)	1/2"	WIDE	2465 × 1849	1233 × 924
		TELE	41 × 31	21 × 15
	1/3"	WIDE	1849 × 1387	925 × 693
		TELE	31 × 23	16 × 12
	1/4"	WIDE	1387 × 1040	693 × 520
		TELE	23 × 17	12 × 9
Back Focal Distance (in air) (mm)			53.23	31.10
Exit Pupil Position (From Image Plane) (mm)			-77	-38
Filter Thread (mm)			M107 × 1	
Mount			C	
Extender			2×	
Mass (kg)			5.2	
Standard Accessories			Iris Control Cable Connection Connector(15-pin, 5-pin)	
Remarks			•With Metal Mount (*1)When power is turned off, iris will automatically close.	

Wiring

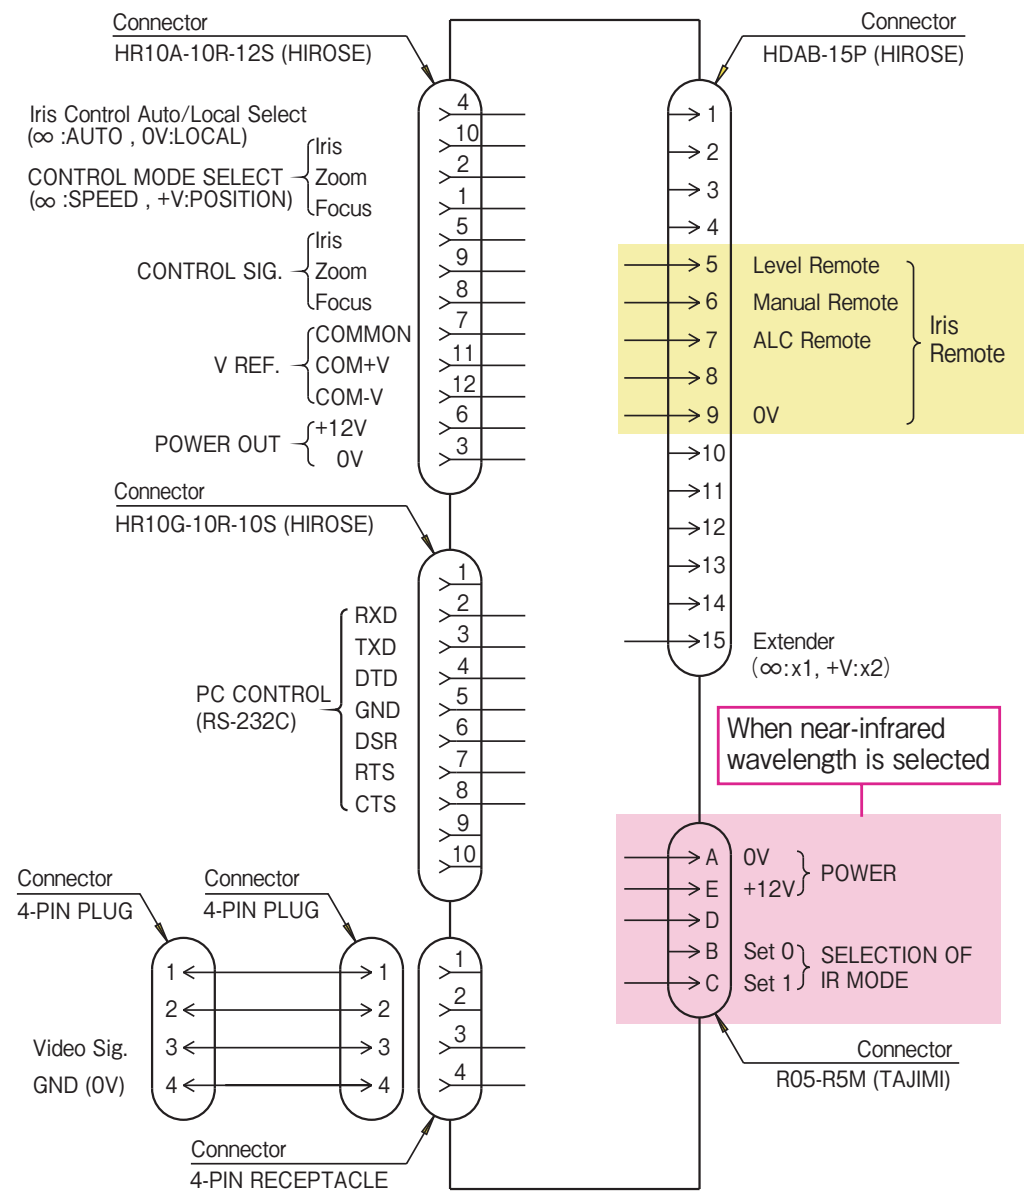

Near-infrared wavelength selected



		S0	S1
Visible light		OFF	OFF
Near-infrared light	850nm	ON	OFF
	880nm	OFF	ON
	950nm	ON	ON